Vigor N65

802.11n USB Adapter

DrayTek
www.draytek.com

- Support Dual Band (2.4GHz & 5GHz) to maximize Wireless Network
- Upgrades your PC/NB to Wireless-N Wi-Fi
- Compatible with 802.11n/g/b/a standards
- Support 64/128-bit WEP, WPA, WPA2 encryption and 802.1x authentication

DrayTek's Vigor N65 is a USB WLAN adaptor that supports dual-band - 2.4GHz or 5.8GHz, and a data transfer rate up to 300Mbps using the MIMO technology. It is compatible with Windows 2000/XP/Vista and the latest Win7 operating system.

Vigor N65 complies with 64/128-bit WEP, 128-bit WPA standard (TKIP/AES authentication) and MIC, IV Expansion for basic WLAN security. It further supports Shared Key Authentication and IEEE 802.1X for enhanced security.

Vigor N65 allows users to benefit from the less congested 5.8GHz WLAN band, while reserving the 2.4GHz band for WLAN devices that support only 2.4GHz band, guaranteeing efficient use of the WLAN bands and improved network performance.

Consistent with the design objectives of DrayTek's network solutions, Vigor N65 can be used as an accessory for DrayTek's VigorAP800 to extend the dual band capability so the system can run on either 5.8GHz or 2.4GHz band.

To further simplify your tasks, VigorAP 800 has the POE (power over Ethernet) capability, allowing you to deploy your 2.4GHz or 5.8GHz WLAN network without the trouble of running additional power cables to the most awkward locations.

In addition, DrayTek's highly integrated professional routers, including Vigor 2830n ADSL2+ series and Vigor 2850n VDSL2 series, support dual bands WLAN, and Vigor N65 is the ideal USB WLAN adaptor to work with these routers.

This means that you can establish a 5.8GHz (or 2.4 GHz) WLAN network at your office or home with the following equipment:

- For ADSL2+ broadband - Vigor2830n or Vigor2830Vn, and one or more Vigor N65.
- For VDSL2 broadband - Vigor2850n or Vigor2850Vn, and one or more Vigor N65.

And, if you are just looking for a simple and effective WLAN adapter to replace those old WLAN adapters that do not support 802.11n or 5.8GHz band, you will find all the features you need in Vigor N65.

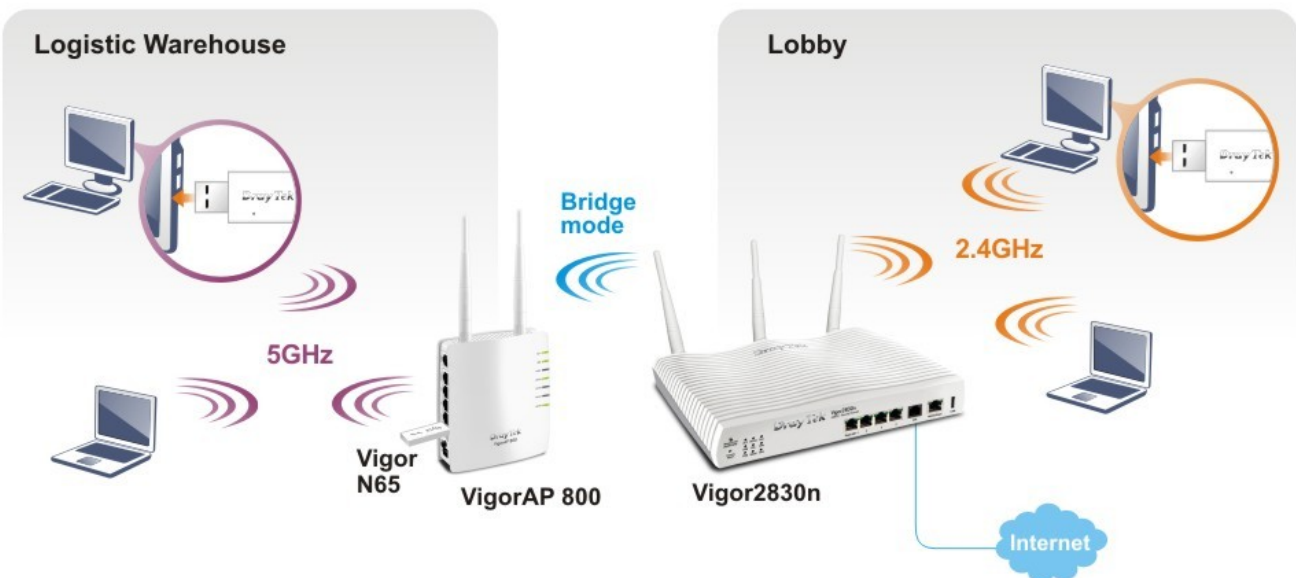Dual Band

USB

802.11n

Vigor N65

802.11n USB Adapter

Technical Specification

Operation Mode	Ad-hoc Mode and 802.11 Ad-hoc Mode	**Antenna Type**	Integrated Antenna
	Infrastructure Mode	**Interface Type**	High Speed USB2.0 Interface
Standard	IEEE 802.11n / g / b / a	**Receiver Sensitivity**	802.11n : -66dBm (MAX)
Frequency Band	2.4GHz Band: 2400 ~ 2483.5MHz		802.11g : -76dBm (MAX)
	5GHz Band: 5150 ~ 5825 MHZ		802.11b : -89dBm (MAX)
Modulation Tech	802.11n / g / a : BPSK, QPSK, 16QAM, 64QAM with OFDM		802.11a : -72dBm (MAX)
		Temperature	Operating : 0°C to +40°C
	802.11b : DQPSK, DBPSK, DSSS, and CCK		Storage : −20°C to +60°C
Transmission Rate	802.11n : Up to 300 Mbps	**Humidity**	10% to 90% Non-condensing
	802.11g :54, 48, 36, 24, 18, 12, 9, 6 Mbps	**Operation Voltage**	5VDC +/- 10%
	802.11b : 11, 5.5, 2, and 1Mbps	**Power Consumption**	Max: 500mA, Idle: 110mA
	803.11a :54, 48, 36, 24, 18, 12, 9, 6 Mbps	**Dimension**	83 (L) x 26.6 (W) x 9.8 (H) mm
Security	Support 64-bit and 128-bit WEP Encryption	**OS Support**	Microsoft Windows 2000, XP, Vista, Windows 7
	Support WPA/WPA2-PSK and WPA/WPA2-EAP		
	Support 802.1x Authentication		
Transmitter Power	802.11n : 13dBm		
	802.11g : 14dBm		
	802.11b : 17dBm		
	802.11a : 12dBm		

- Actual data throughput will vary according to the network conditions and environmental factors, including volume of network traffic, network overhead and building materials.
- Environment conditions may adversely affect wireless operation distance.

Integration of Vigor2830n WLAN and VigorAP 800

Logistic Warehouse

Lobby

Bridge mode

5GHz

2.4GHz

Vigor N65

VigorAP 800

Vigor2830n

Internet

Note : Wireless performance always depends on your specific environment.
If your N65 connected to VigorAP 800, the WMM functionality is only working within 2.4GHz frequency.

CE ① FC